


PARAPET CLAMP GUARDRAIL SYSTEM

GUARDRAILS

FEATURES & BENEFITS

- Fits 4" - 24" parapets
- Set-up OSHA Compliant guardrail system
- Lightweight - only takes one person to install
- Durable, non-corrosive components
- Powder-coated steel makes it resistant to corrosion and damage

SHOWN:
PART #15170

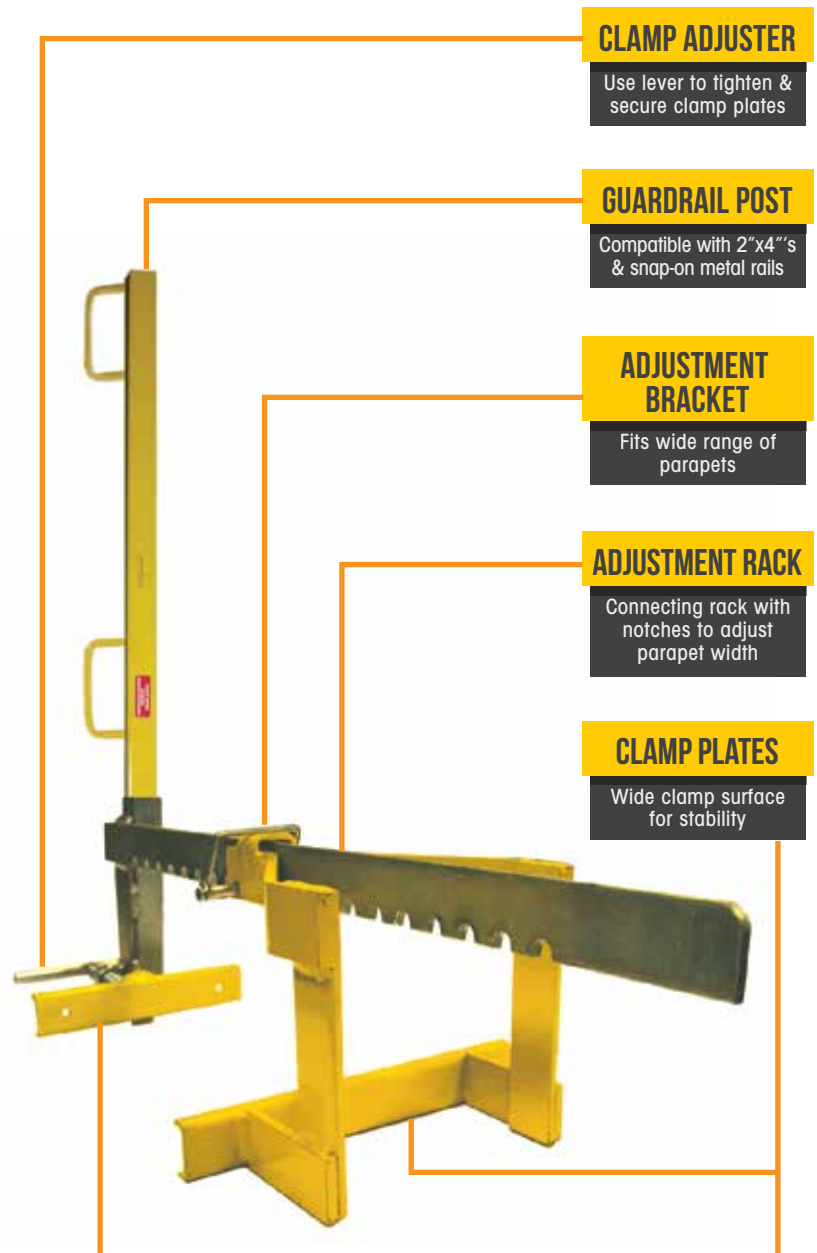

SPECIFICATIONS

STANDARDS:

OSHA 1926 Subpart M & 1910

MATERIALS:

Powder-Coated Steel
& Galvanized Steel

WORKER CAPACITY:

Top Rail: Must withstand 200 lbs. of force
Midrail: Must withstand 150 lbs. of force

PERFORMANCE:

- Minimum Parapet Wall Height: 7'
- Parapet Placement Width: 8' Apart

NOTES:

- Fits any parapet from 4" - 24" in width
- Clamp adjuster must face in towards work surface for use in combination with 42" guardrail post (part #15175) and 2" x 4" or 2" x 6" construction grade lumber guardrails. Guardrails must overlap at least 12" at each end.

PART #	DESCRIPTION	WEIGHT
15170	Parapet Clamp Guardrail	15 lbs, 24 lbs. with included post

APPLICATIONS



FALL PREVENTION:

Parapet Clamp Guardrail Systems may be used in Fall Prevention applications only:

- Fall Prevention Systems are placed around the leading edges of any and all fall hazards to prevent a worker from going over an edge and may be used in substitute of Fall Protection or safety netting systems.
- Installation requirements for C-Slab Grabber Guardrail Systems set forth in equipment instructions must be adhered to.
- Fall Arrest, Work Positioning, Climbing, Rescue, and any other systems must never be connected to Fall Prevention Systems.



NEED MORE INFORMATION?

P: 1.800.466.6385 | VISIT OUR WEBSITE: GUARDIANFALL.COM